

# CFP TECHNOLOGIES

Reg. no. 1987/027414/23

P.O Box 15740

Sinoville

0129

Tel:0828570324

012 5673618

Email: Cjvdb@mweb.co.za

[www.cfptechnologies.co.za](http://www.cfptechnologies.co.za)

## Veichi AC310 VFD

### CFP Technologies Rev/Stop/Fwd panel

AC300 Connector	CFP Tech Remote Panel wire colour
X1 (Forward)	Black
X2 (Reverse)	Blue
COM	Violet
GND (ext pot)	Green
AI1 (ext pot)	White
+10V (ext pot)	Yellow
Earth (E)	Thick Blue cable (approx 120mm long)


F00.03 **	Factory Defaults Reset. Change value to 22
-----------	--

\*\* To start setup from scratch. Will reset all settings back to factory defaults

### Change the following parameters on Veichi AC310

Parameter	Parameter Description	Value
F05.00	X1 Forward Run	1
F05.01	X2 Reverse Run	2
F05.20	2 wire configuration	0
F01.01	External Terminal Control	1
F01.02	External Potentiometer (if required)	2

## VEICHI AC310

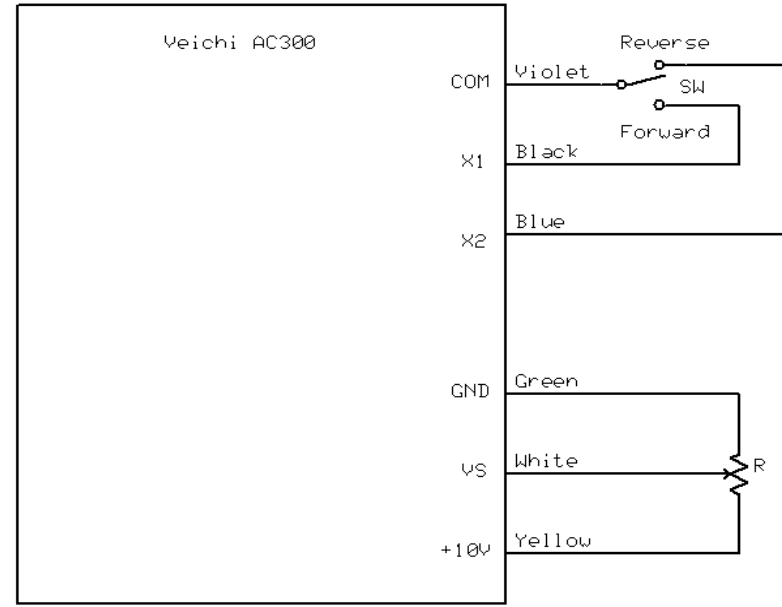

### Optional settings

Parameter	Value
F01.10	Maximum Frequency allowed in Hz
F01.12	External speed reference max frequency
F01.13	Lower Frequency limit in Hz
F01.22	Acceleration Time in seconds
F01.23	Deceleration time in seconds